


● SC Series :

SC series is available in side guide assemblies. Center guide assemblies are fully compliant with the ASME Standard for silent chain. operate on industry standard sprockets. Sc Chain can accommodate speeds approaching 33 m/s and loads in excess of 750 kw. We recommend SC chain primarily as a replacement chain for existing power transmission applications where it has been successfully employed in the past and also used in cold cutter machinery as feed system.

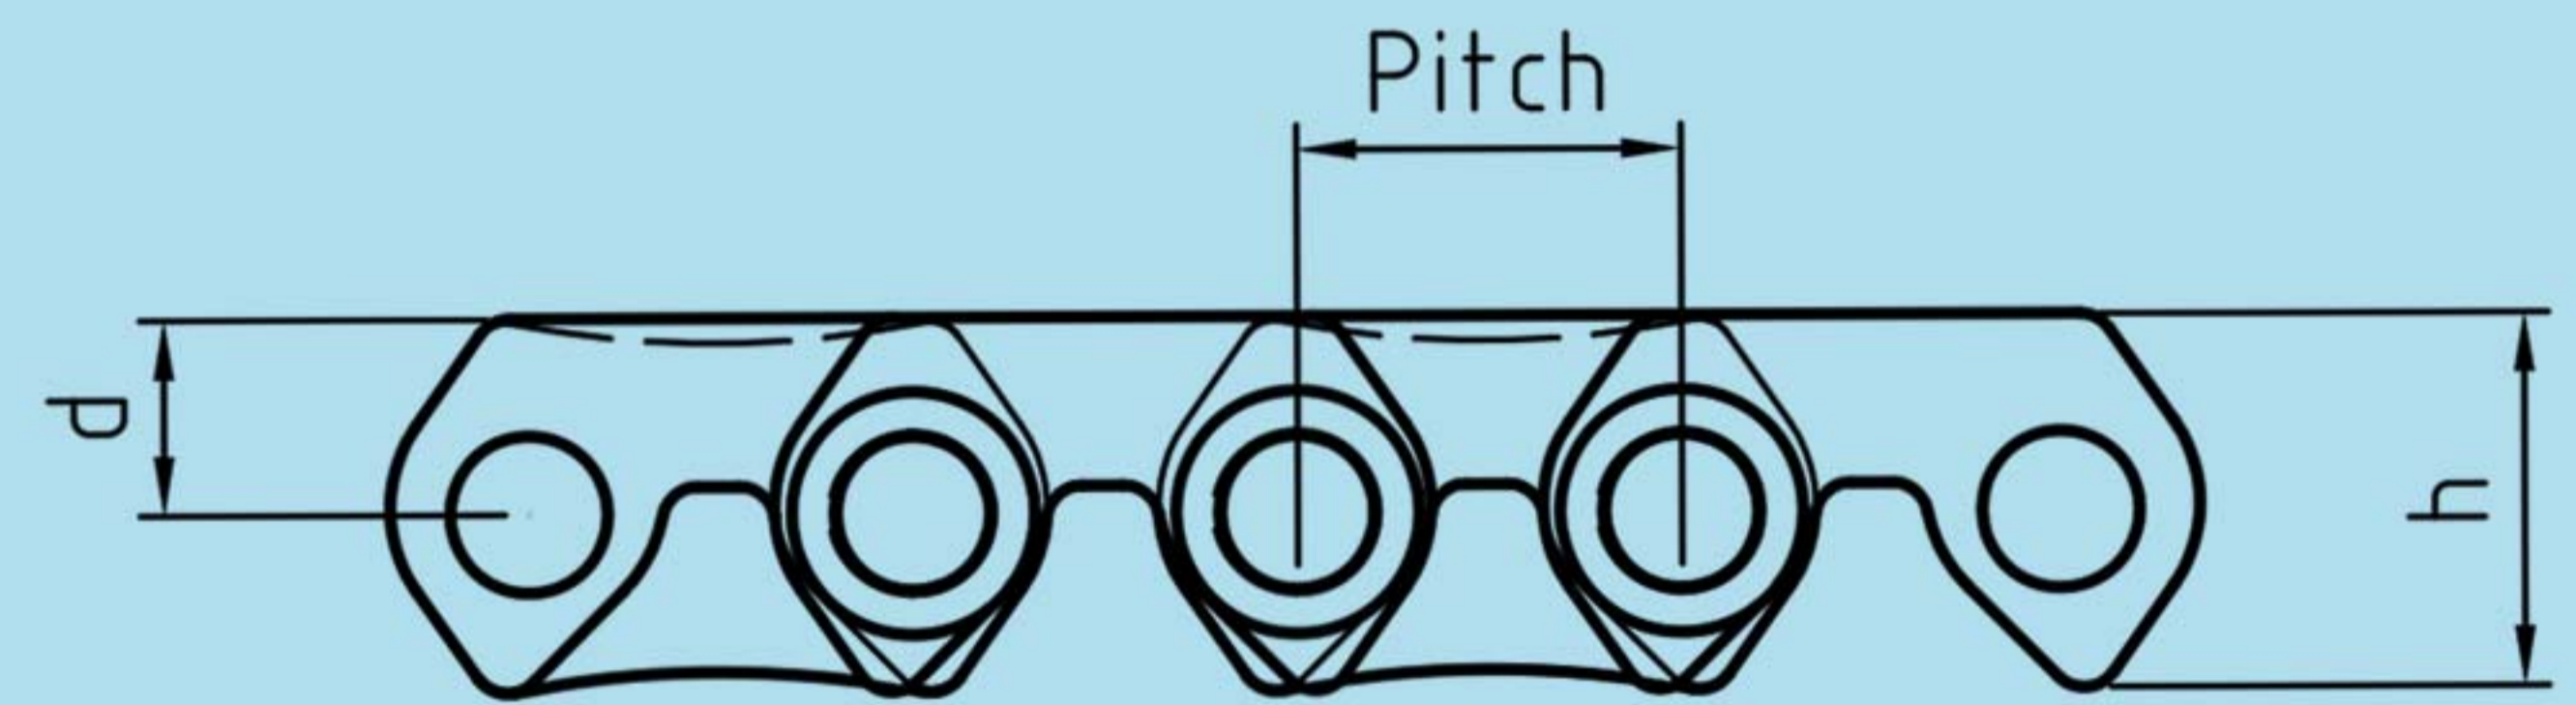

Pitch	Part Number	Nominal Width	Guide Type	Width Over Heads WH	Width Over Links WL	Width At Connector WC	Weight (kg/m)	Breaking Load (kN)	h	d	t
1/2"	SC408	51	CG	52.3	47.5	54.1	2.7	47	11.9	5.3	1.5×2
5/8"	SC510	64	CG	64.3	57.4	66.0	4.5	69	16.5	8.4	1.5×2